



经济型滚珠花键


— 轴为经济型花键轴 —

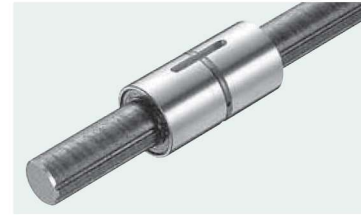

公称型号构成

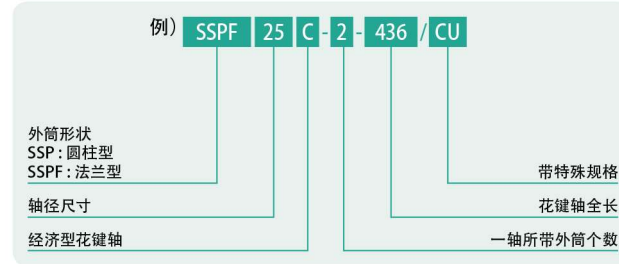

滚珠花键

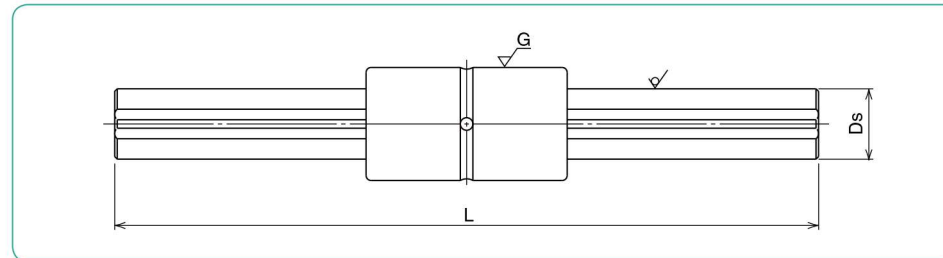

轴径尺寸	Ds mm	主要尺寸						适用外筒	
		标准长度						SSP	SSPF
		L mm							
20A	20	500	1,000	2,000	3,000	4,000	5,000	○	○
25A	25	500	1,000	2,000	3,000	4,000	5,000	○	○
30A	30	500	1,000	2,000	3,000	4,000	5,000	○	○
40A	40	500	1,000	2,000	3,000	4,000	5,000	○	○
50A	50	500	1,000	2,000	3,000	4,000	5,000	○	○
20	18.2	500	1,000	2,000	3,000	4,000	5,000	○	○
25	23	500	1,000	2,000	3,000	4,000	5,000	○	○
30	28	500	1,000	2,000	3,000	4,000	5,000	○	○
40	37.4	500	1,000	2,000	3,000	4,000	5,000	○	○
50	47	500	1,000	2,000	3,000	4,000	5,000	○	○

- 轴全长的公差范围
全长4,000以下的: JIS B0405 粗级
全长超过4,000的: ±5.0
上述以外, 对公差如有特殊要求, 请另行指示。
- 外筒形状及尺寸请参考各尺寸表。
- 使用经济型花键轴时, 外筒的额定负荷约为各表参数值的70%。

○标志: 有 — 标志: 无