

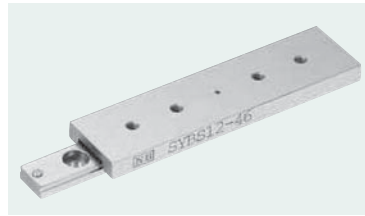


SYBS型

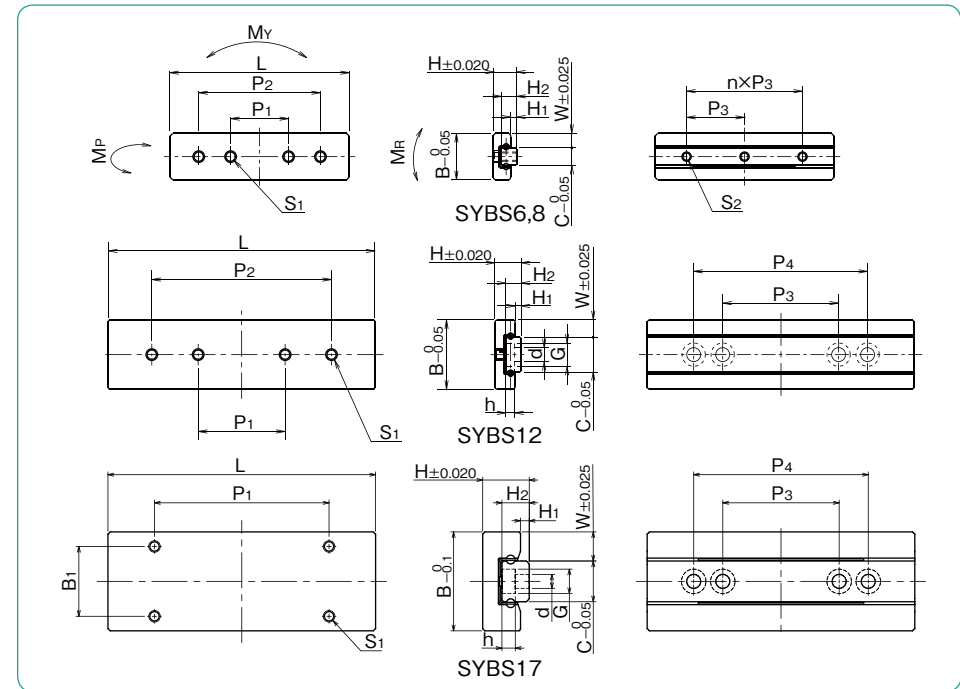

公称型号构成

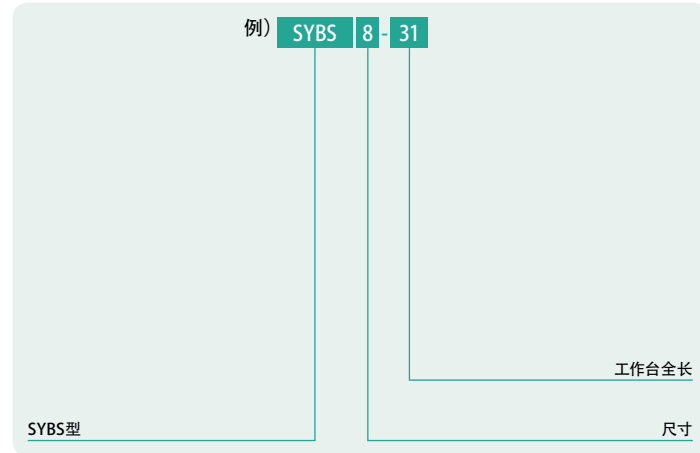

公称型号	组装尺寸				工作台尺寸						S ₁ 最大拧入深度 mm
	H	W	H ₁	有效行程	B	L	P ₁	P ₂	B ₁		
	mm	mm	mm	mm	mm	mm	mm	mm	mm		
SYBS 6-13	3.2	2	0.7	5	6	13	6.0	-	-	M1.4	0.5
SYBS 6-21				12		21	10.0	-	-		
SYBS 8-11	4	2.5	1	4	8	11	5.5	-	-	M1.6	0.7
SYBS 8-21				12		21	10.0	-	-		
SYBS 8-31				18		31	10.0	21	-		
SYBS12-23	4.5	3	1	12	12	23	8.0	-	-	M2	1.2
SYBS12-31				18		31	15.0	-	-		
SYBS12-46				28		46	15.0	31	-		
SYBS17-23				14		23	10.0	-	-		
SYBS17-31	8	5	1.5	19	17	31	20.0	-	-	M2	3
SYBS17-46				29		46	30.0	-	-		

※1: SYBS12中付带有底座安装螺钉。
我们还配备了其他各种尺寸的安装螺钉, 请选择使用。(参考P.G-53)

H ₂	C	底座尺寸						基本额定负荷		允许负荷 F N	静态允许力矩			质量 g	尺寸
		d×G×h	S ₂	P ₃	n	P ₄	动 C N	静 Co N	M _P N·m		M _Y N·m	M _R N·m			
mm	mm	mm		mm	mm	mm									
2.0	2	-	M1	7	1	-	154	180	60.1	0.21	0.25	0.21	1.4	6-13	
				7	2	-	229	315	105	0.57	0.69	0.37	2.2	6-21	
2.6	3	-	M1.6	5	1	-	201	211	70.4	0.23	0.28	0.35	2.0	8-11	
				10	1	-	368	493	164	1.02	1.22	0.83	3.7	8-21	
2.6	6	2.4×4×1.5 ^{※1}	-	10	2	-	473	704	234	1.97	2.35	1.19	5.5	8-31	
				15	-	-	404	563	187	1.30	1.55	1.80	7.6	12-23	
				15	-	-	473	704	234	1.97	2.35	2.25	10.2	12-31	
				20	-	30	658	1,120	375	4.80	5.72	3.60	15.2	12-46	
4.7	7	2.4×4.2×2.3	-	15	-	-	775	888	296	2.09	2.49	3.33	19.2	17-23	
				15	-	-	984	1,240	414	3.80	4.53	4.66	26.2	17-31	
				20	-	30	1,350	1,950	651	8.75	10.4	7.32	38.4	17-46	

1N≒0.102kgf 1N·m≒0.102kgf·m